


Primary Chaincase Lubricant

PRODUCT DESCRIPTION

Bel-Ray® Primary Chaincase Lubricant is specifically designed for the primary chaincase of all Big Twin model motorcycles equipped with a wet diaphragm spring clutch from 1984 to present. It delivers all-weather clutch performance while providing maximum wear protection for the primary chain and cog set.

Primary Chaincase Lubricant delivers outstanding clutch feel, superior wear prevention and deposit control for top lubrication performance. Premium base oils provide seal conditioning to prevent fluid leaks. Its distinct red color makes leaks easy to identify in multiple lubrication cavity engines. Primary Chaincase Lubricant meets or exceeds V-Twin requirements and WILL NOT void warranties. When combined with Big Twin Transmission Oil it provides complete drive train protection and unbeatable performance for all stock and modified Big Twins.

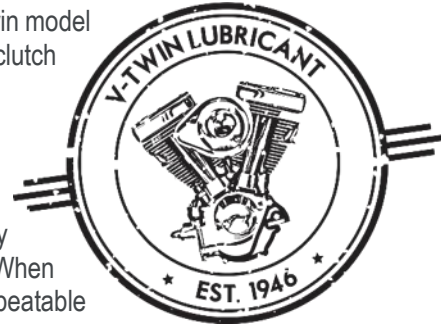

PRODUCT FEATURES

- Improved clutch performance
- Superior drive train protection
- All temperature reliability
- Distinct color
- Helps prevent leaks
- Superior deposit control

BENEFITS

- Provides smooth, positive clutch hook-up without slipping or shudder in all service conditions from around-town cruising to aggressive drag race launches
- Exclusive Bel-Ray anti-wear chemistry reduces primary drive chain stretch and cog wear to extend primary drive service life
- High Viscosity Index formulation provides dependable performance from sub-freezing to tropical conditions
- Red coloration makes it easily distinguishable from motor oil, simplifying service
- Formulated for outstanding seal compatibility to keep gaskets and seals pliable and leak-free
- Special low-ash formula extends clutch life while preventing deposits to reduce drive train operating temperature

APPLICATIONS

- For the primary chaincase of all Big Twin model motorcycles equipped with a wet diaphragm spring clutch from 1984 to present
- May be used in chaincases equipped with original, modified or aftermarket high performance clutch assemblies.
- Recommended for operation in both especially cold- and hot weather climates

DISTRIBUTED BY:

Calumet Branded Products, LLC
1060 N Capitol Ave
Suite 6-401
Indianapolis, IN 46204
Technical Services: 317-328-5660
www.belray.com

To the best of our knowledge, the information contained herein is accurate, but is given without warranty or guarantee. We assume no liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of the suitability of any information or material for the use contemplated, the name in use and whether there is any infringement of patents is the sole responsibility of the user.

All trademarks are owned by one or more affiliates within the Calumet, Inc. organization, unless otherwise specified.

© 2026 Calumet, Inc.

7/24/2026

TECHNICAL DATA SHEET



PRODUCT DATA

Typical Properties		
Property	Test Method	80W
Density @ 15°C (g/mL)	ASTM D4052	0.8691
Viscosity @ 40°C (cSt)	ASTM D445	57.6
Viscosity @ 100°C (cSt)	ASTM D445	9.53
Viscosity Index	ASTM D2270	150
Flash Point, °C (°F)	ASTM D92	232 (450)
Pour Point, °C (°F)	ASTM D97	-45 (-49)
Brookfield Viscosity, cP	ASTM D2983	8,338 @ -26°C
Copper Corrosion, 3 h @ 100°C (Rating)	ASTM D130	1b

HEALTH and SAFETY

Health and safety recommendations for products can be found on the Safety Data Sheet (SDS) at www.belray.com

DISTRIBUTED BY:

Calumet Branded Products, LLC
1060 N Capitol Ave
Suite 6-401
Indianapolis, IN 46204
Technical Services: 317-328-5660
www.belray.com

To the best of our knowledge, the information contained herein is accurate, but is given without warranty or guarantee. We assume no liability whatsoever for the accuracy or completeness of the information contained herein. Final determination of the suitability of any information or material for the use contemplated, the name in use and whether there is any infringement of patents is the sole responsibility of the user.

All trademarks are owned by one or more affiliates within the Calumet, Inc. organization, unless otherwise specified.

© 2026 Calumet, Inc.

7/24/2026